

Participating in EarthScope:

Hosting a Transportable Seismic Station

earth
scope

www.earthscope.org



EarthScope earthquake monitoring stations are constructed, operated, and maintained by the Incorporated Research Institutions for Seismology (IRIS) with funds from the National Science Foundation.

v0411

EarthScope is installing transportable seismic stations to record earthquakes occurring locally, nationally, and worldwide. The data are used to produce images of the Earth's interior and provide new insights into the earthquake process. Planned for over 2000 sites across North America, EarthScope is seeking participation from local landowners and schools to accomplish this university-based research experiment.

EarthScope will:

- Respect the property and privacy of landowners throughout the experiment, notifying the landowner whenever access is required.
- Be responsible for the security and operation of the station.
- Assume liability if the equipment is damaged or stolen, remain responsible for any damage done to the landowner's property, and hold the landowner harmless for any loss or injury.
- Remove the equipment completely after the experiment.
- Provide the landowner with updates about the project and sample recordings from their station.

Seismic Station Specifications


Transportable seismic stations have a low profile – there is no noise or motion associated with the equipment. To reduce interference from surface vibrations and to protect the equipment, the seismometer and associated electronics are buried 6 feet below the ground inside a 42-inch diameter tank. Power is supplied by two solar panels mounted on a pole about 20 feet from the tank, with the cables buried inside a conduit. Data are transmitted to the EarthScope data processing center via cellular, broadband, or satellite communication systems. When satellite systems are used, the 3-foot dish and an enclosure with electronics are located near a source of AC power linked by radio to the seismic station. The AC power required for the satellite dish is 25 watts or 220 kWh each year (about \$40 per year). In areas with livestock, a fence can be erected for protection. The equipment can also be painted to blend in with the surroundings.

Installation, Maintenance, and Removal

Installation of an EarthScope transportable seismic station usually takes 3 days. On the first day, a backhoe digs a hole 4 feet wide and 7 feet deep. A plastic tank is placed in the hole and cement is poured into the bottom to make a sealed container for the equipment. On a second day a few weeks later, the seismograph electronics, sensor, and communications equipment are installed. An extra day is occasionally required for testing and reconditioning the landscape. The buried equipment is heavily insulated and the tank is often completely covered with soil or rocks to keep the temperature stable.

The seismic stations are temporary, remaining in place for about two years, and are then reused at another site. The equipment operates continuously and routine maintenance is performed remotely. If the equipment malfunctions, it is detected at the data processing center and a service trip may be necessary to correct the problem.

Disassembling the seismic station takes one day. EarthScope removes all the equipment, cuts the plastic tank at the level of concrete (usually 6 feet below grade), removes the tube, and fills in the hole. If requested, the entire tank and concrete can be removed.

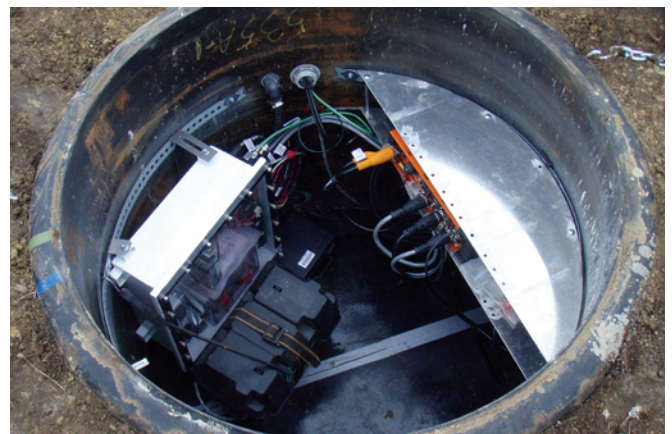

For more information, contact usarray@iris.edu • 1-800-504-0357 (tel/fax)